



- Flush Mount Oval 2-ring LED Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser create excellent light distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- 120V Line Voltage, Triac Dimming, 5-100% dim range, or
- 120-277V Universal Voltage, 0-10V Dimming 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
FMO2-3235	120V / 120-227V	15	1050	70	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL& BRONZE	16 Inch Dia.
FMO2-3240	120V / 120-227V	20	1400	70	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL& BRONZE	16 Inch Dia.
FMO2-3255	120V / 120-227V	15	1050	70	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL& BRONZE	16 Inch Dia.

DIMENSION

Size (Inch)	FMO2-3235	FMO2-3240	FMO2-3255
L	32.36	32.36	32.36
W	18.26	18.26	18.26
H	4.19	4.19	4.19

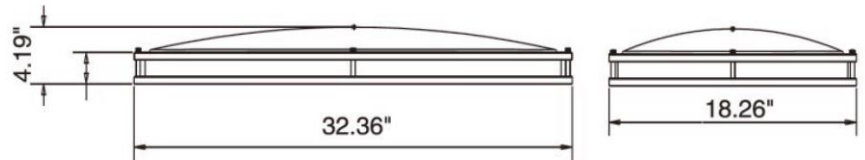

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
FMO2-3235	/	1	895x520x160mm		859	65 CBM	
FMO2-3240	/	1	895x520x160mm		859	65 CBM	
FMO2-3255	/	1	895x520x160mm		859	65 CBM	