



- Flush Mount Classic 2-ring LED Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser create excellent light distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- 120V Line Voltage, Triac Dimming, 5-100% dim range, or
- 120-277V Universal Voltage, 0-10V Dimming 1-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




**SPECIFICATION**

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
FMC2-1626	120V / 120-227V	26	2080	80	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL&B RONZE	16 Inch Dia.
FMC2-1635	120V / 120-227V	35	2800	80	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL&B RONZE	16 Inch Dia.
FMC2-1640	120V / 120-227V	40	3200	80	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL&B RONZE	16 Inch Dia.
FMC2-2435	120V / 120-227V	35	2800	80	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL&B RONZE	24 Inch Dia.
FMC2-2440	120V / 120-227V	40	3200	80	80/90	3000/4000/5000/3CCT Selectable	Triac / 0-10V	NICKEL&B RONZE	24 Inch Dia.

**DIMENSION**

Size (Inch)	FMC2-16	FMC2-24
Dia.	10	12
H	2-7/8"	2-7/8"

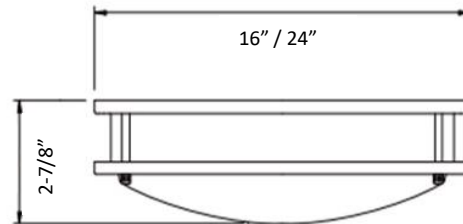

**PACKAGING**

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
FMC2-1626	450x110x447mm	4	465x462x467mm	4.1 KG	2552	65 CBM	10460 KG
FMC2-1635	450x110x447mm	4	465x462x467mm	4.1 KG	2552	65 CBM	10460 KG
FMC2-1640	450x110x447mm	4	465x462x467mm	4.1 KG	2552	65 CBM	10460 KG
FMC2-2435		1	658x105x658mm	1.5 KG	1408	65 CBM	8712 KG
FMC2-2440		1	658x105x658mm	1.8 KG	1408	65 CBM	8712 KG