



- Flush Mount Dome LED Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser create excellent light distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- 120V Line Voltage, Driver-on-board solution
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
FMDM-712	120	12	840	70	80	3000/4000/5000/3CCT Selectable	Triac Dim.	NICKEL/ORB	7-1/4 x 4-3/8 inch
FMDM-715	120	15	1050	70	80	3000/4000/5000/3CCT Selectable	Triac Dim.	NICKEL/ORB	7-1/4 x 4-3/8 inch

DIMENSION

Size (Inch)	FMDM-712	FMDM-715
Dia. Base	6-3/4"	6-3/4"
Dia. Dome	7-1/4"	7-1/4"
H	4-3/8"	4-3/8"

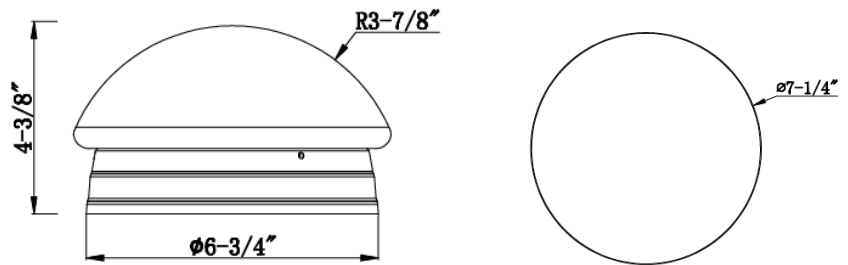

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
FMDM-712	200x200x155mm	12	630x425x335mm		8562	65 CBM	
FMDM-715	200x200x155mm	12	630x425x335mm		8562	65 CBM	