

- Flush Mount Round Fabric Cap LED Ceiling Fixture
- Die-formed cold-rolled steel housing with high transmission acrylic diffuser create excellent light distribution and uniformity
- High efficiency 2835 LED module, up to 100lm/W
- 120V Line Voltage, Driver-on-board solution
- Triac Dimming, 5-100% dim range
- High Power Factory, Low THD
- Suitable for damp location
- 50,000H @ L70 Long Lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
FMRF-1615	120	15	1200	80	80	3000/4000/5000/3CCT Selectable	Triac Dim.	WHITE	16x 4/3/4 inch
FMRF-1620	120	20	1600	80	80	3000/4000/5000/3CCT Selectable	Triac Dim.	WHITE	16x 4/3/4 inch
FMRF-1626	120	26	2080	80	80	3000/4000/5000/3CCT Selectable	Triac Dim.	WHITE	16x 4/3/4 inch

DIMENSION

Size (Inch)	FMRF-16
Dia. Base	16"
H	4-3/4"

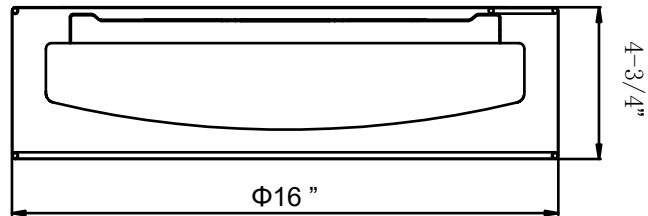

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
FMRF-1615	427x427x141mm	4	447x447x590mm		2751	65 CBM	
FMRF-1620	427x427x141mm	4	447x447x590mm		2751	65 CBM	
FMRF-1626	427x427x141mm	4	447x447x590mm		2751	65 CBM	