



- Robust die-cast aluminum housing
- High impact, heat resistant borosilicate glass lens
- Low-wattage consumption with highly efficient LEDs Engine
- 120V Line Voltage, Driver-On-Board Solution
- Available for Wall Mount or Ceiling Mount
- Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
WBK4-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	10-5/8"Lx10-5/8"Wx4-5/8"D
WBK4-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	10-5/8"Lx10-5/8"Wx4-5/8"D
WBK4-15	120	15	1050	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	10-5/8"Lx10-5/8"Wx4-5/8"D

DIMENSION

Size (Inch)	WBK4
L	10-5/8"
W	10-5/8"
D	5/8"

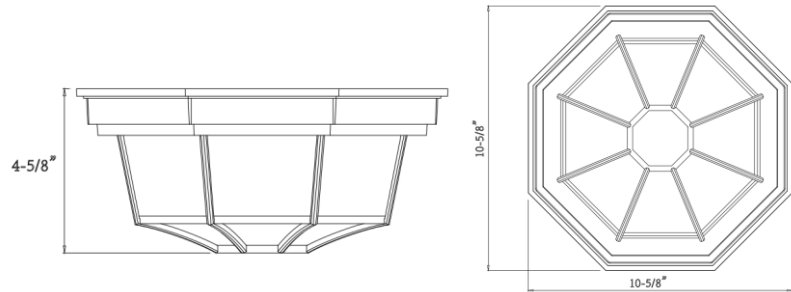

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WBK4-09	278x278x149mm	4	576x318x298mm		4690	65 CBM	
WBK4-12	278x278x149mm	4	576x318x298mm		4690	65 CBM	
WBK4-15	278x278x149mm	4	576x318x298mm		4690	65 CBM	