



- Weather resistant cold-rolled steel housing, slim designed decorative wall mount
- High Transmission PC Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




**SPECIFICATION**

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
WMD1-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	11"H x 7-7/8"W x 3-3/4"D
WMD1-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	11"H x 7-7/8"W x 3-3/4"D
WMD1-15	120	15	1050	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	11"H x 7-7/8"W x 3-3/4"D

**DIMENSION**

Size (Inch)	WMD1
H	11"
W	1-1/8"
D	3-3/4"

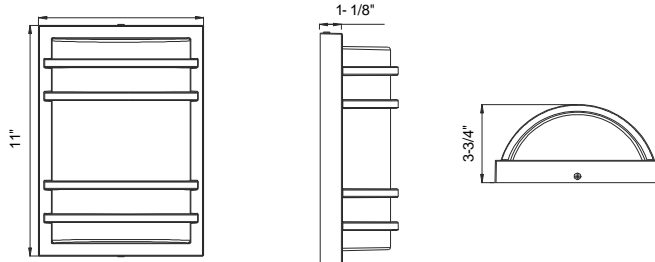

**PACKAGING**

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMD1-09	220x115x318mm	6	457x367x338mm		6774	65 CBM	
WMD1-12	220x115x318mm	6	457x367x338mm		6774	65 CBM	
WMD1-15	220x115x318mm	6	457x367x338mm		6774	65 CBM	