



- Robust aluminum housing, modern designed LED Wall Mount Fixture
- High transmission acrylic diffuser - white or frosted optional
- Low-wattage consumption with highly efficient LEDs Engine
- 120V Line Voltage, Driver-On-Board Solution
- Suitable for wet location
- 50,000H @L70 long lifetime




**SPECIFICATION**

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
WMD3-06	120	6	420	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	9-1/4”H x 8-1/2”W x 5” D
WMD3-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	9-1/4”H x 8-1/2”W x 5” D
WMD3-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black	9-1/4”H x 8-1/2”W x 5” D

**DIMENSION**

Size (Inch)	WMD3
H	9-1/4”
W	8-1/2”
D	5”

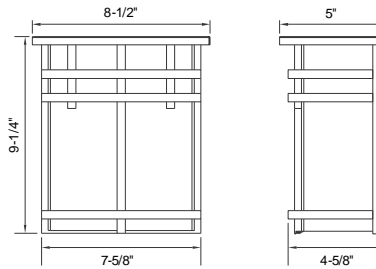

**PACKAGING**

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40’HQ FCL	VOLUMN	WEIGHT
WMD3-06	220x115x318mm	6	457x367x338mm		6774	65 CBM	
WMD3-09	220x115x318mm	6	457x367x338mm		6774	65 CBM	
WMD3-12	220x115x318mm	6	457x367x338mm		6774	65 CBM	