



- Robust die-cast aluminum housing, elegant slim design Mini Slim Wall Pack
- High Transmission Glass Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime




**SPECIFICATION**

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	DIMENSION
WMD6-12	120	12	840	70	80	3000/4000/5000/3CCT	Triac Dim.	Bronze/Black	10"H-x7"Wx3-3/4"D
WMD6-15	120	15	1050	70	80	3000/4000/5000/3CCT	Triac Dim.	Bronze/Black	18"H-x7"Wx3-3/4"D
WMD6-18	120	18	1050	70	80	3000/4000/5000/3CCT	Triac Dim.	Bronze/Black	18"H-x7"Wx3-3/4"D
WMD6-20	120	20	1400	70	80	3000/4000/5000/3CCT	Triac Dim.	Bronze/Black	24"H-x7"Wx3-3/4"D
WMD6-25	120	25	1750	70	80	3000/4000/5000/3CCT	Triac Dim.	Bronze/Black	24"H-x7"Wx3-3/4"D

**DIMENSION**

Size (Inch)	WMD6-12	WMD6-15/18	WMD6-20/25
H	10"	18"	24"
W	7"	7"	7"
D	3-/34"	3-/34"	3-/34"

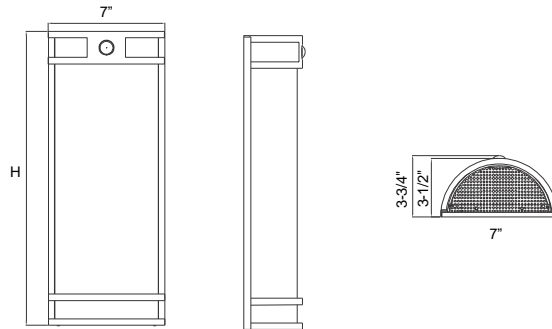

**PACKAGING**

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMD6-12	642x159x115mm	4	643x337x255mm		4633	65 CBM	
WMD6-15	642x159x115mm	4	643x337x255mm		4633	65 CBM	
WPD6-20	642x159x115mm	4	643x337x255mm		4633	65 CBM	
WMD6-25	642x159x115mm	4	643x337x255mm		4633	65 CBM	
WMD6-30	642x159x115mm	4	643x337x255mm		4633	65 CBM	