



- Elegant slim design Mini Slim Wall Pack
- Robust die-cast aluminum housing
- High Transmission Glass Diffuser - White or Frosted optional
- Low-watt consumption with high-efficient LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime




## SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WPM4-06	120	6	420	70	80	3000/4000/5000	Non- Dim.	Bronze/Black
WPM4-09	120	9	630	70	80	3000/4000/5000	Non- Dim.	Bronze/Black
WPM4-12	120	12	840	70	80	3000/4000/5000	Non- Dim.	Bronze/Black

## DIMENSION

Size (Inch)	WPM3
H	9-3/4"
W	7-1/8"
D	3-3/4"

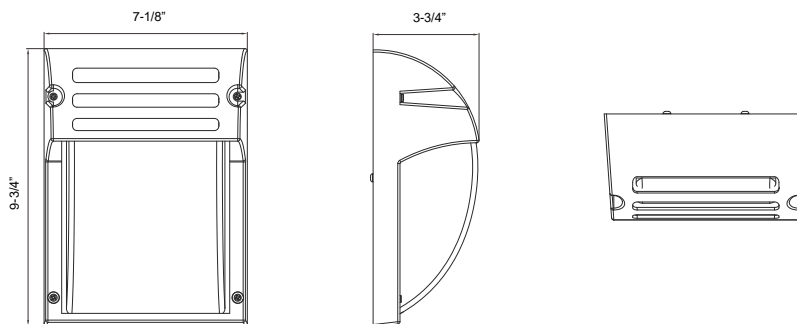

## PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WPM4-06	200x128x277mm	6	417x407x297mm		7618	65 CBM	
WPM4-09	200x128x277mm	6	417x407x297mm		7618	65 CBM	
WPM4-12	200x128x277mm	6	417x407x297mm		7618	65 CBM	