



- Elegant slim design Mini Slim Wall Pack
- Polycarbonate housing with high transmission PC diffuser
- Integrated photocell for dusk to dawn operation, excellent for long lasting energy saving
- Low-watt consumption with high-efficient LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- IP65 Suitable for wet location
- 50,000H @L70 long lifetime
- Title 24/JA8 Compliant




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	CONTROL	FINISH	DIMENSION
WPM3-12	120	12	840	70	80	3000/4000/5000	Built-in photocell	Bronze/Black	10"Lx7-1/2"Wx4-1/4"E
WPM3-15	120	15	1050	70	80	3000/4000/5000	Built-in photocell	Bronze/Black	10"Lx7-1/2"Wx4-1/4"E
WPM3-18	120	18	1260	70	80	3000/4000/5000	Built-in photocell	Bronze/Black	10"Lx7-1/2"Wx4-1/4"E

DIMENSION

Size (Inch)	WPM3
H	10"
W	7-1/2"
D	4-1/4"
MC	6-1/4"

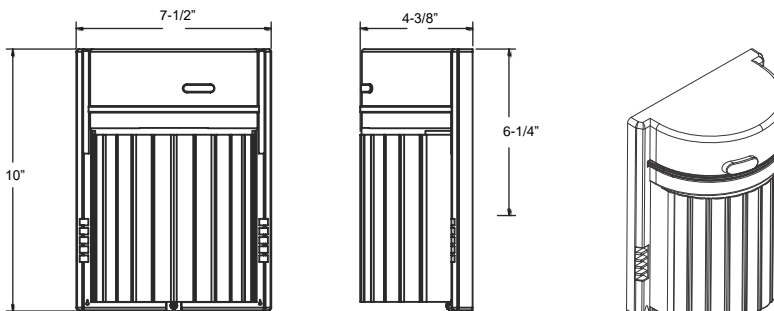

MC - Mounting Center

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WPM3-06	200x128x277mm	6	417x407x297mm		7618	65 CBM	
WPM3-09	200x128x277mm	6	417x407x297mm		7618	65 CBM	
WPM3-12	200x128x277mm	6	417x407x297mm		7618	65 CBM	