



- Robust die-cast aluminum housing, Down Light only
- High impact, Wheat resistant clear glass lens
- Low-wattage consumption with highly efficient COB LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dim, 10-100% dimming range
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WMC1-09D	120	9	420	100	80	3000/4000/5000/3CCT	Triac Dim	ORB/Black
WMC1-09	120	9	630	100	80	3000/4000/5000	Non-Dim	ORB/Black

DIMENSION

Size (Inch)	WMC1
H	6-1/4"
W	4-3/8"
D	5-5/8"
Dia.	3-1/8"

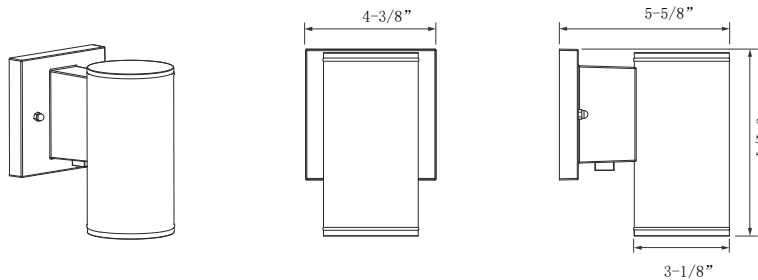

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMC1-09D	153x116x180	12	490x482x200mm		16,259	65 CBM	
WMC1-09	153x116x180	12	490x482x200mm		16,259	65 CBM	