



- Robust die-cast aluminum housing, Up & Down Light
- High impact, heat resistant clear glass lens
- Low-wattage consumption with highly efficient COB LEDs Module, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Triac Dim, 10-100% dimming range
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WMC2-1012	120	12	420	100	80	3000/4000/5000/3CCT	Triac Dim	ORB/Black
WMC2-1414	120	14	630	100	80	3000/4000/5000/3CCT	Triac Dim	ORB/Black

DIMENSION

Size (Inch)	WML1-10	WML1-14
H	10"	14"
W	4-3/8"	4-3/8"
D	5-5/8"	5-5/8"
Dia.	3-1/8"	3-1/8"

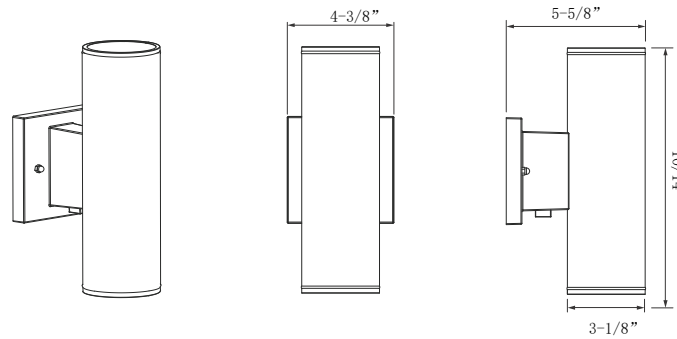

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WMC2-1012	153x116x278	6	490x482x298mm		10,912	65 CBM	
WMC2-1414	153x116x278	6	490x482x298mm		10,912	65 CBM	