



- Robust die-cast aluminum housing
- High transmittance Acrylic diffuser or Heat-resistant borosilicate glass diffuser optional
- Low-wattage consumption with highly efficient LEDs Engine, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime




SPECIFICATION

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WML2-06	120	6	420	70	80	3000/4000/5000	Triac Dim.	Bronze/Black
WML2-09	120	9	630	70	80	3000/4000/5000	Triac Dim.	Bronze/Black
WML2-12	120	12	840	70	80	3000/4000/5000	Triac Dim.	Bronze/Black

DIMENSION

Size (Inch)	WML2
H	9-3/4"
W	7-5/8"
D	4-1/8"

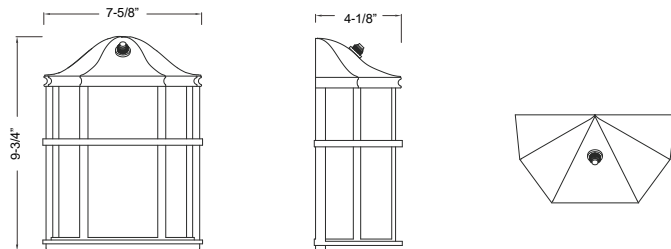

PACKAGING

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WML2-06	225x115x280mm	6	470x365x300mm		7,461	65 CBM	
WML2-06	225x115x280mm	6	470x365x300mm		7,461	65 CBM	
WML2-06	225x115x280mm	6	470x365x300mm		7,461	65 CBM	