



- Robust die-cast aluminum housing
- High impact, heat resistant borosilicate glass lens
- Low-wattage consumption with highly efficient LEDs Engine, up to 100lm/W
- 120V Line Voltage, Driver-On-Board Solution
- Photocell optional
- Available for Wall Mount only
- Suitable for wet location
- 50,000H @L70 long lifetime




**SPECIFICATION**

PART #	INPUT (Vac)	OUTPUT (W)	DELIVERED LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH
WML3-06	120	6	420	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black
WML3-09	120	9	630	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black
WML3-12	120	12	840	70	80	3000/4000/5000	Non-Dim/ Photocell	ORB/ Black

**DIMENSION**

Size (Inch)	WML3
H	8-1/4"
W	4-5/8"
D	5-7/8"

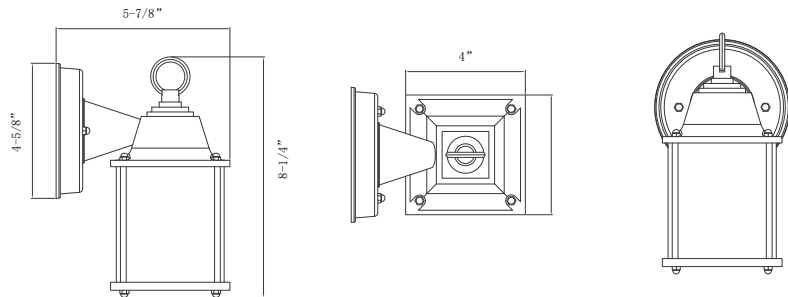

**PACKAGING**

PART#	INDIVIDUAL BOX	UNITS/MASTER	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WML3-06	365x203x241	6	385x629x502mm		3,159	65 CBM	
WML3-09	365x203x241	6	385x629x502mm		3,159	65 CBM	
WML3-12	365x203x241	6	385x629x502mm		3,159	65 CBM	