



- Robust die-cast aluminum housing
- Elegant yet rugged construction effortlessly integrates with existing architecture.
- 120-277V wide range input voltage
- 0-10V dimming standard
- Complies with UL1598 and CSA C22.2
- DLC Premium Listed
- IP65 Rated Enclosure, Suitable for Wet Locations
- 100,000H @L70 long lifetime




ORDERING GUIDE

| PART # | INPUT (Vac) | OUTPUT (W) | LUMEN OUTPUT (LM) | EFFICACY (LPW) | CRI | AVAILABLE CCT (K) | DIMMING | FINISH | CERTIFICATION |
|---------|-------------|------------|-------------------|----------------|-----|-------------------|---------|--------|---------------|
| WPKA-37 | 120-277 | 37 | 4550-4700 | 126 | >70 | 3000/4000/5000 | 0-10V | BRONZE | ETL, DLC |
| WPKA-58 | 277-480 | 58 | 7500-7650 | 133 | >70 | 3000/4000/5000 | 0-10V | BRONZE | ETL, DLC |
| WPKA-70 | 120-277 | 70 | 10050-10200 | 140 | >70 | 3000/4000/5000 | 0-10V | BRONZE | ETL, DLC |

KEY FEATURES

- Type II or Type IV two optional optical distribution.
 - Adjustable, full-cutoff design with a tilt mechanism that allows for precise aiming
 - Housing is protected by a RoHS compliant, corrosion resistant powder coat finish.
 - Night sky friendly: eliminates light pollution and minimizes glare.
 - System power factor > 0.9 and THD <20%.
 - Operating temperature: -40°C to 40°C (-40°F to 104°F).
 - Luminaire is ready to be surface mounted.
 - Net Weight: 1.3kg(37W), 2.1kg(58W), 2.7kg(70W)
- **Optional optical distribution:** Type II or Type IV
• **Optional Accessories:** Photocell


LUMINAIRE PHOTOMETRIC

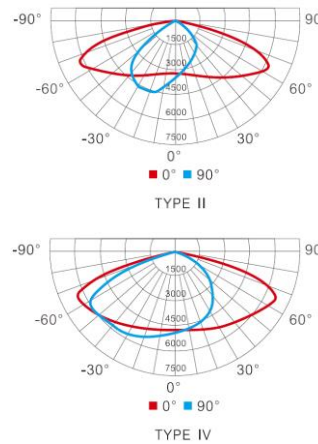

| IESNA | LM-63-2002 |
|--------------|------------|
| Light source | LED |
| Input Watts | 37 |
| Total Lumens | 4662 |
| Efficiency | 126 LPW |
| Beam Angle | 110° |

DIMENSION

| Size (mm) | 37W | 58W | 70W |
|-----------|-----|-----|-----|
| A | 205 | 281 | 330 |
| B | 165 | 216 | 267 |
| C | 98 | 110 | 124 |

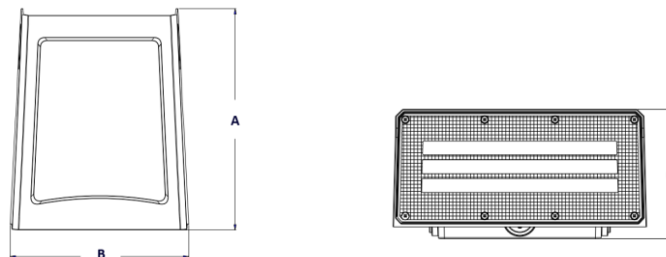

PACKAGING

| PART# | UNIT / BOX | MASTER BOX | WEIGHT | UNITS/40'HQ FCL | VOLUMN | WEIGHT |
|---------|------------|--------------------|--------|-----------------|--------|----------|
| WPKA-37 | 1 | 240 x 190 x 130 mm | 1.7 KG | 11333 | 68 CBM | 19267 KG |
| WPKA-58 | 1 | 330 x 260 x 150 mm | 2.6 KG | 5312 | 68 CBM | 13812 KG |
| WPKA-70 | 1 | 383 x 300 x 180 mm | 3.2 KG | 3400 | 68 CBM | 10880 KG |