



- Robust die-cast aluminum housing with matte lens
- Elegant yet rugged construction effortlessly integrates with existing architecture.
- 120-277V wide range input voltage
- 0-10V dimming standard
- Complies with UL1598 and CSA C22.2
- DLC Premium Listed
- IP65 Rated Enclosure, Suitable for Wet Locations
- 100,000H @L70 long lifetime



ORDERING GUIDE


PART #	INPUT (Vac)	OUTPUT (W)	LUMEN OUTPUT (LM)	EFFICACY (LPW)	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	CERTIFICATION
WPSM-15	120-277	15	1950-2020	110	>80	3000/4000/5000	0-10V	BRONZE	ETL, DLC P
WPSM-20	120-277	20	2600-2700	110	>80	3000/4000/5000	0-10V	BRONZE	ETL, DLC P
WPSM-30	120-277	30	3900-4050	110	>80	3000/4000/5000	0-10V	BRONZE	ETL, DLC P

KEY FEATURES

LUMINAIRE PHOTOMETRIC

- Housing is protected by a RoHS compliant, corrosion resistant powder coat finish.
- Beam Angle 120 °, Soft and Uniform Light. No UV or IR in the beam.
- System power factor > 0.9 and THD <20%. Instant start, NO flickering, NO humming.
- Operating temperature: -25°C to 40°C (-13°F to 104°F).
- Net Weight: 0.7KG (1.54 lbs).


- **Optional Accessories:**
 - Photocell
 - Emergency Battery



IESNA	LM-63-2002
Light source	LED
Input Watts	15.22
Total Lumens	1891.9lm
Efficiency	124 LPW
Beam Angle	121.8 DEG

DIMENSION

Size (mm)	15W	20W
A	205	281
B	165	216
C	98	110

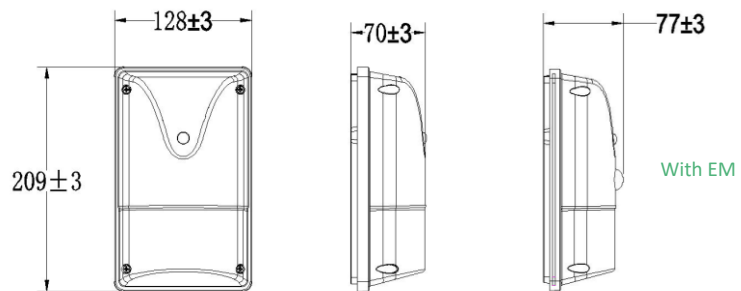

PACKAGING

PART#	UNIT / BOX	MASTER BOX	WEIGHT	UNITS/40' GP FCL	VOLUMN	WEIGHT
WPSM-15	10	417 x 285 x 239 mm	9.0 KG	22,400	62 CBM	20,340 KG
WPSM-20/30		450 x 285 x 256 mm	12.0 KG	19,600	62 CBM	11,520 KG