



- Robust die-cast aluminum housing
- High impact, heat resistant borosilicate glass lens
- Low-wattage consumption with highly efficient patented LEDs
- 120-277V or 277-480V wide range input voltage
- 0-10V dimming standard
- Complies with UL1598 and CSA C22.2
- DLC Premium Qualified
- Suitable for Wet Locations
- 100,000H @L70 long lifetime



ORDERING GUIDE


PART #	INPUT (Vac)	OUTPUT (W)	LUMEN OUTPUT (LM)	EFFICACY	CRI	AVAILABLE CCT (K)	DIMMING	FINISH	CERTIFICATION
WPT1-40L	120-277	40	5400-5600	140	>70	3000/4000/5000	0-10V	BRONZE	ETL, DLC
WPT1-40H	277-480	40	5200-5400	135	>70	3000/4000/5000	0-10V	BRONZE	ETL, DLC
WPT1-60L	120-277	60	7700-8100	135	>70	3000/4000/5000	0-10V	BRONZE	ETL, DLC

KEY FEATURES

LUMINAIRE PHOTOMETRIC

- Housing is protected by a RoHS compliant, corrosion resistant powder coat finish.
- Standard architectural bronze finish.
- System power factor > 0.9 and THD <20%.
- Operating temperature: -40°C to 40°C (-40°F to 104°F).
- Designed for wall mounting above four feet from the ground.
- Housing is configured for mounting directly over a standard 4" outlet box (by others) or surface wiring via any of the convenient 1/2" threaded conduit entries.
- Net Weight: 8.6 lbs.



- **Optional Accessories:** Cutoff Shield, Photocell



IESNA	LM-63-2002
Light source	LED
Input Watts	40
Total Lumens	5600
Efficiency	133 LPW
Beam Angle	107.1

DIMENSION

Size (mm)	40W	60W
A	360	360
B	186	186
C	235	235

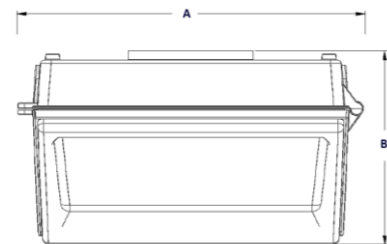

PACKAGING

PART#	UNIT / BOX	MASTER BOX	WEIGHT	UNITS/40'HQ FCL	VOLUMN	WEIGHT
WPT1-40L	1	400 x 330 x 240 mm	4.5 KG	2100	68 CBM	9450 KG
WPT1-60L	1	400 x 330 x 240 mm	4.6KG	2100	68 CBM	9660 KG